

*EVS32 Symposium*

*Lyon, France, May 19-22, 2019*

## **Benefits of electrified powertrains in medium and heavy duty vehicles**

R. Vijayagopal, A. Rousseau

*Argonne National Laboratory, 9700 S. Cass Ave., Lemont, IL 60439, USA ram@anl.gov*

---

### **Abstract**

Medium and heavy duty (MD-HD) vehicles account for over 26% of the petroleum consumption in the United States [1]. The benefits of electrified powertrains for light-duty vehicles are well understood. Quantifying the benefits of powertrain electrification will help fleet operators understand the advantages or limitations in adopting electrified powertrains in their fleets. MD-HD vehicles vary in size and shape, as they are designed for specific applications, so it is necessary to model each kind of truck separately to understand what kind of powertrain architecture will be feasible for their daily operations. This paper examines 11 types of vehicles and 5 powertrain technology choices to identify the most feasible powertrain electrification options for each application.

**KEY WORDS:** trucks, simulation, hybrid, powertrain

### **1. Introduction**

Vehicle inventory and use survey data provides the numbers of various types of trucks in the United States and their daily driving requirements [2]. This information guides the vehicle selection in this study. Based on this data, 13 different vehicles belonging to different classes and purposes were shortlisted. Together, these vehicles represent over 50% of the medium- and heavy-duty vehicles on U.S. roads. Table 1 lists the vehicles and their purposes. The models were built using the library files available in Autonomie [4], a simulation tool developed by Argonne National Laboratory capable of simulating various kinds of vehicles. The design requirements and performance of these trucks vary significantly. The power ratings of truck engines are easy to find, but trucks' performance capabilities are not always advertised. For this study, we needed to determine the cargo and performance capabilities of each vehicle in order to design comparable electrified variants that can perform the same duties as the baseline vehicle. Each conventional vehicle is modelled in Autonomie

using publicly available information. Cargo carrying capability, grade capability, acceleration capability and possibly many more factors can be used to define the unique demands on a truck. Benchmarking tests are then simulated to obtain performance data. The details of these tests appear in a previous paper [5] about fuel cell vehicle sizing.

Table 1. Vehicles chosen to represent the medium- and heavy-duty market in the U.S.

Vehicle Class	Purpose
Class 2b: 6000–10,000 lb.	Small Van
Class 3: 10,001–14,000 lb.	Enclosed Van
Class 3: 10,001–14,000 lb.	Service, Utility Truck
Class 4: 14,001–16,000 lb.	Walk-In, Multi-Stop, Step Van
Class 5: 16,001–19,500 lb.	Utility, Tow Truck
Class 6: 19,501–26,000 lb.	Construction, Dump Truck
Class 7: 26,001–33,000 lb.	School Bus
Class 7: 26,001–33,000 lb.	Day Cab
Class 8: > 33,000 lb	Sleeper
Class 8: > 33,000 lb	Sleeper Aero
Class 8: > 33,000 lb	Day Cab

## 2. Powertrain Component Sizing

### 2.1. Architectures

The five powertrain architectures considered in this work are enumerated below:

1. Conventional (Conv) powertrain with a diesel engine
2. Mild hybrid with start-stop system (ISG)
3. Strong hybrid (HEV) with a motor that will assist the engine during a launch and enable regenerative braking
4. Series plug-in electric vehicle (PHEV), which can drive half of the daily driving requirements with the energy from an onboard battery pack
5. Battery powered electric vehicle (BEV), which can drive the entire desired daily driving range with energy from an onboard battery pack

All engines considered in this study are diesel powered. Gasoline and CNG variants were modelled for certain classes but are not included in this paper. For this study, it is assumed that the body and glider of the conventional vehicle remains unchanged when powertrain changes are implemented. For smaller trucks, this approach is reasonable enough to give a good estimate of the power and energy requirements of the vehicles. In the cases of heavy vehicles with a longer range, an additional scenario is considered. Several OEMs have announced plans to build class 8 BEV tractors. All of these proposed vehicles have much better aerodynamics

than baseline conventional vehicles, which reduces the propulsion power requirement during highway driving. To represent such a vehicle, the "Sleeper Aero" category was added as a class 8 truck. It represents a present day truck with aggressive aerodynamic improvements [5]. We expect to achieve 28% reduction in aerodynamic drag in this case. Some OEMs claim even lower drag coefficient ( $C_d$ ) values by using custom trailers and devices such as camera based rear view mirrors. This study uses a more conservative estimate.

## 2.2 Sizing requirements and approach

This study assumes that a truck with an electrified powertrain will be functionally equivalent to or better than its conventional counterpart [6]. It should be able to carry the same cargo over the desired daily driving distance in the same amount of time as a conventional vehicle. To ensure this, a few performance parameters are identified as performance benchmarks. These parameters are (a) 0–30 mph acceleration time, (b) 0–60 mph acceleration time, (c) maximum sustainable speed at 6% grade, and (d) sustained cruising speed at highway conditions. A summary of the performance requirements is shown in Table 2.

Table 2. Performance summary for all vehicles considered in this study

Class	Purpose	0-30 mph (s)	0- 60 mph (s)	Grade Speed 6% (mph)	Cruise Speed (mph)	90 Percentile Daily Driving Range (Miles)
2	Van	7	21.5	65	70	200
3	Service	5.8	18	65	70	150
3	Van	6.4	24	49	70	200
4	WalkIn	7.5	35	40	70	150
5	Utility	9	24	65	65	150
6	Construction	11.6	46.5	27	65	150
7	DayCab	18	66	31	65	250
7	School	18.5	60	30	60	150
8	DayCab	18	66	31	65	250
8	Sleeper	18	60	32	65	500

These values were estimated by simulating the conventional vehicle models for performance tests. It should be noted that the actual vehicle may have been originally designed with very different functional considerations. Sizing alternate powertrains for comparable performance based on these parameters is just one way to ensure a fair comparison between powertrains.

Component size for each powertrain is guided by unique requirements. The sizing procedure is explained in a previous work [7], and the dependence of each component on the requirements is summarized in Table 3.

Engine power is determined by the grade climbing requirements in the case of heavy duty trucks, which are designed to haul large loads. A class 8 sleeper truck is a good example of an application where continuous operation requirements, such as highway driving and grade climbing, are a lot more important than acceleration performance. For this study, grade climbing capability is tested using an 11 mile drive on a 6% grade. Conventional, ISG and HEVs require an engine sized big enough to meet the grade power requirements. Although HEVs have the option of assisting the engine using the motor, the relatively small battery size makes it impossible to sustain that assistance for the entire 11 miles. Once the battery runs out of energy, the engine still has to provide sufficient power to drive the vehicle. Hybridizing such trucks may even require the use of a larger engine, as more weight is added to the truck in the form of motor and batteries. PHEVs have a larger battery pack and can ameliorate this issue. The batteries in PHEVs are large enough to meet part of the power requirement during the entire grade test. In this case, the engine can be sized to meet the remaining load on grade tests or to meet continuous power needed to cruise at highway speeds.

Table 3. Factors affecting the component size for different powertrains

Powertrain	Engine	Motor	Battery
Conventional			
ISG	Acceleration grade and cruise	Size based on starter and alternator	Energy: Sustain electric loads for at least one minute*
HEV		Maximize regen in ARB transient	Power and energy: sustain peak motor output during acceleration, as well as regenerative braking events
PHEV	Grade and cruise	Acceleration grade and cruise	Energy: Electric range determined using EPA's 65 mph cycle. Power: To support motor & aux loads
BEV			

Acceleration is a critical requirement for smaller trucks because they have to drive alongside other light-duty vehicles in urban environments. They are also likely to have a higher power-to-weight ratio compared to heavier trucks. In this case, hybridizing offers the chance to downsize the engine and augment the propulsion power using a motor. Trucks in the class 2-4 segment are examples of this.

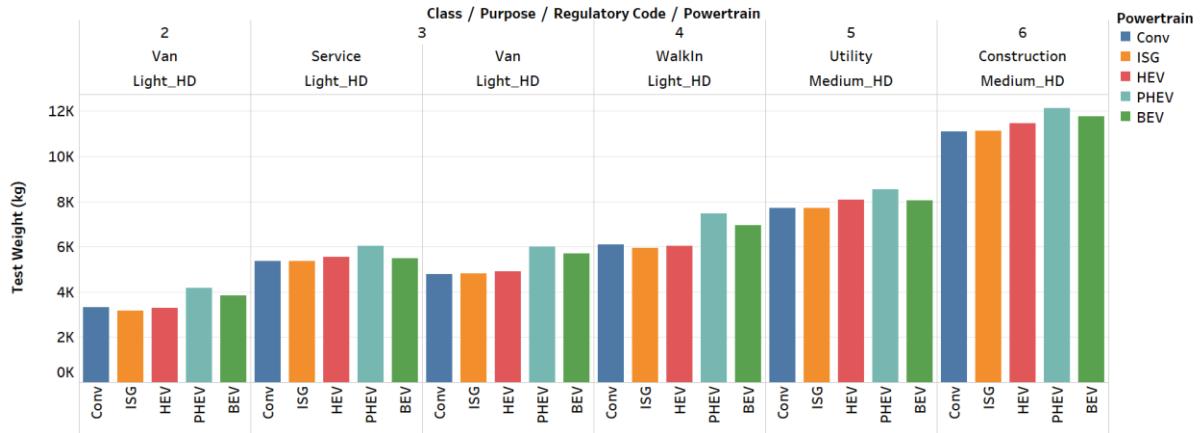


Figure 1. PHEVs and BEVs result in vehicles heavier than conventional baseline

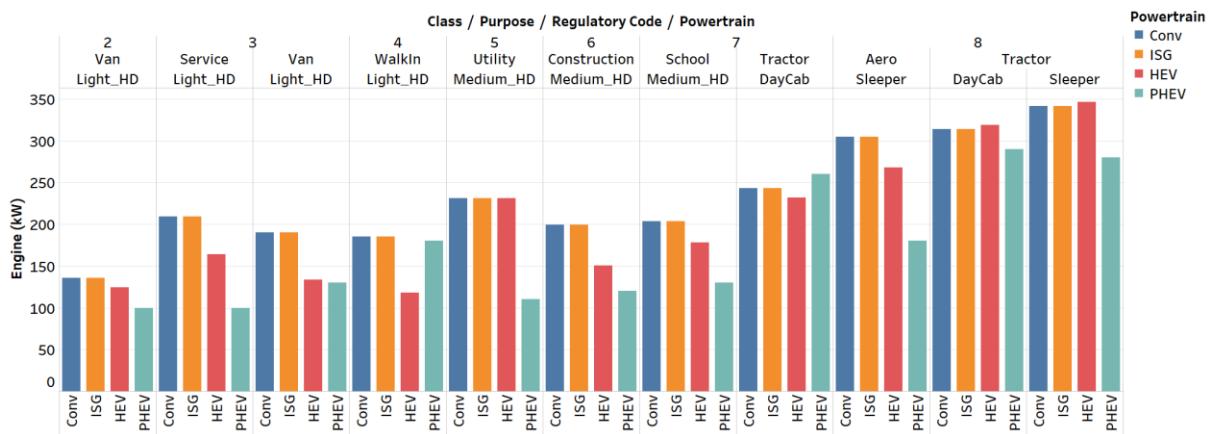


Figure 2. Engine size varies for each truck based on the powertrain choice

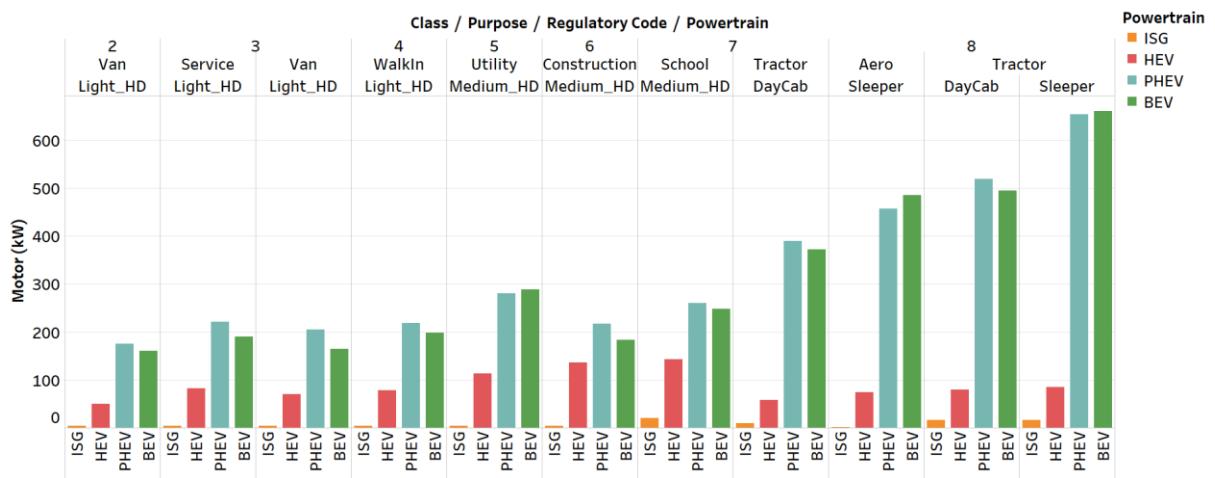


Figure 3. Peak motor power required for various truck variants

The electric motor in an ISG is used to start the engine and provide auxiliary electric power in an efficient manner. The HEV motor is sized to achieve a higher level of regenerative braking in the ARB transient cycle.

This cycle is used because it is the only transient speed cycle used in the proposed regulatory framework put forward by the U.S. Environmental Protection Agency (EPA). The motor power for the various vehicles is shown in Figure 3.

For PHEVs and BEVs, the motor is sized to meet the performance requirements. This necessitates the use of electric machines with continuous power outputs comparable to those of the baseline engine. For these vehicles, the battery is sized for the driving range. The 65 mph driving cycle from EPA is the most demanding of the three regulatory cycles proposed by EPA. To have a conservative estimate of the battery size, the range is measured using EPA's 65 mph drive cycle. If we size a delivery van to drive 200 miles at 65 mph, it would result in a vehicle that can drive a lot farther under normal city driving conditions. Battery energy in HEVs are around 5-8 kWh, and ISGs have a battery pack under 1 kWh. Those packs are designed to provide the necessary power to the motor for very short amount of time.

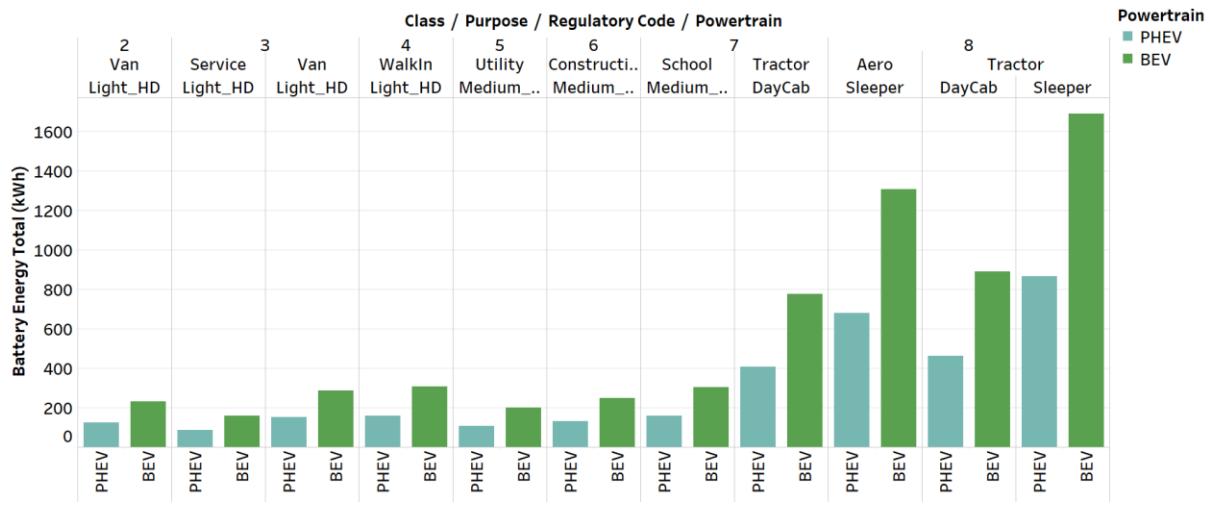


Figure 4. Battery energy for PHEV and BEV

### 3. Fuel Consumption Comparison

U.S. EPA has put forward regulatory drive cycles for medium and heavy duty vehicles. The test procedure from EPA is applicable only to conventional vehicles, and it could be difficult to apply it to PHEVs and BEVs in a fair manner. In this study we quantify the petroleum displacement potential of advanced powertrains using an approach explained in a previous work [7]. Every vehicle is driven over the desired daily driving distance in each of the three regulatory cycles. One of those cycles is a transient cycle, which allows the ISGs and HEVs to demonstrate their potential in urban driving conditions. The other two are highway cycles at 55 mph and 65 mph, where conventional diesel trucks can achieve their best performance. The appropriate powertrain for each case can be identified by analyzing these results for every class and vocation.

The fuel saving potential of various powertrains for medium duty trucks is shown in Figure 5. ISGs get only about 5% benefit at most in transient driving conditions, and do not show any benefit in highway driving. HEVs can get a substantial 20-30% savings in medium duty applications during the transient drive cycle. On

high-speed cycles without any stops or appreciable regenerative braking, the benefit drops to less than 15%. This shows that HEVs are a technically sound solution for small trucks operating under urban driving conditions.



Figure 5. Fuel savings in medium duty trucks

The fuel saving potential of various powertrains for heavy duty trucks is shown in Figure 6.

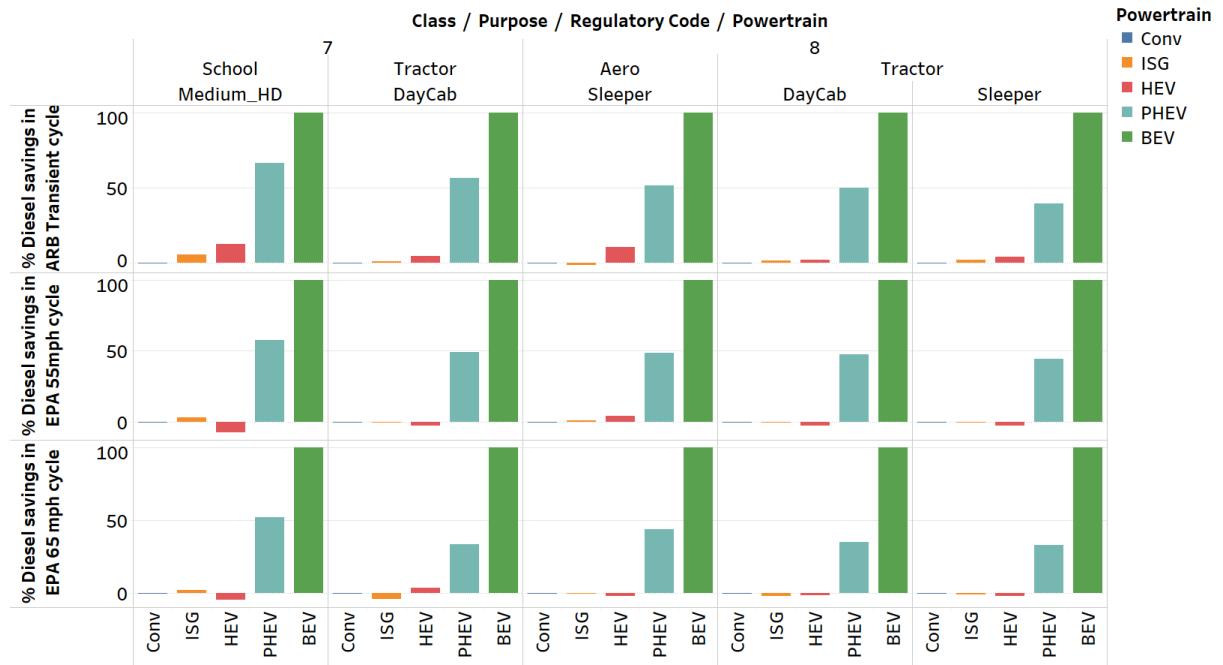


Figure 6. Fuel savings in heavy duty trucks

HEVs get about 15% savings in overall fuel usage in urban driving in the cases of school buses. ISGs don't show any appreciable fuel savings in this category. PHEVs or BEVs are needed to achieve significant fuel

savings in heavy duty vehicles. PHEVs designed in the way described in this study have the potential to displace 40% or more fuel in all the applications. In case of many small trucks, 100% fuel displacement is achieved for urban driving conditions.

This would indicate that sizing the battery for the most demanding driving conditions is a very conservative approach, and it could be relaxed. On the other hand, there are several heavy trucks for which PHEVs produce only a 40% savings in fuel. BEVs are able to run the daily desired range in all three cycles and achieve 100% petroleum displacement as expected.

## 4. Conclusions and next steps

This study shows that HEVs are an attractive choice for medium duty trucks that operate mostly in urban conditions. For other, heavier vehicles or those operating mostly on highways, fuel savings can be achieved by using PHEV or BEV variants.

Having a common sizing approach across all medium and heavy duty vehicle ensures a fair comparison for most applications. There could be some limitations for this approach. For example, Class 4 walk-in trucks are typically not designed for highway driving. They are quite boxy, as the design objective is to maximize the cargo volume, while keeping the truck short enough to make it maneuverable in urban driving conditions. The sizing approach in this paper will require a PHEV in this category to have an engine powerful enough to sustain highway driving. This might result in a engine that is not fully utilized in real world conditions. The next step in improving sizing logic would be to look at real world driving conditions for each of these trucks and design the powertrain specifically for those application-specific requirements.

It should be noted that none of these vehicles were optimized for fuel economy. This study focused on a rule-based sizing logic likely to produce an economically viable design. Optimizing the powertrain for fuel economy will be an appropriate follow-up work

## 5. Acknowledgments

This work was supported by the U.S. Department of Energy (DOE), Vehicle Technology Office, under the direction of J. Ward and R. Nealer, under contract DE-AC02-06CH11357. The submitted manuscript has been created by UChicago Argonne, LLC, Operator of Argonne National Laboratory (“Argonne”). Argonne, a DOE Office of Science laboratory, is operated under Contract No. DE-AC02-06CH11357. The U.S. Government retains for itself, and others acting on its behalf, a paid-up, nonexclusive, irrevocable worldwide license in said article to reproduce, prepare derivative works, distribute copies to the public, and perform publicly and display publicly, by or on behalf of the Government.

## 6. References

- [1] Energy Information Administration, "Annual Energy Outlook, 2015," [Online]. Available: <http://www.eia.gov/forecasts/aoe/>.
- [2] National Renewable Research Laboratory, "FleetDNA Database," [Online]. Available: [http://www.nrel.gov/transportation/fleettest\\_fleet\\_dna.html](http://www.nrel.gov/transportation/fleettest_fleet_dna.html).
- [3] Argonne National Laboratory, "Autonomie," [Online]. Available: [www.autonomie.net](http://www.autonomie.net). [Accessed 2017].
- [4] United States Census Bureau, "Vehicle Inventory and Use Survey," 2002. [Online]. Available: <http://www.census.gov/svsd/www/vius/2002.html>.
- [5] Scott et.al, "Test, Evaluation, and Demonstration of Practical Devices/Systems to Reduce Aerodynamic Drag of Tractor/Semitrailer Combination Unit Trucks." United States: N. p., 2007. Web. doi:10.2172/926158.
- [6] J. Marcinkoski, "Driving an Industry: Medium and Heavy Duty Fuel Cell Electric Truck Targets," in EVS29 Symposium, Montreal, Canada, 2016.
- [7] Vijayagopal, R., Rousseau, A., and Vallet, A., "Fuel Consumption and Performance Benefits of Electrified Powertrains for Transit Buses," SAE Technical Paper 2018-01-0321, 2018, <https://doi.org/10.4271/2018-01-0321>.

## 7. Authors



Ram Vijayagopal is a research engineer at Argonne National Laboratory. He works in the area of modelling and simulation to evaluate the fuel and energy consumption impact of advanced vehicle technologies. He received his bachelor's degree in engineering from University of Kerala in 2000 and a master's degree in engineering from University of Michigan in 2008.



Aymeric Rousseau is the Manager of the Vehicle Modelling and Simulation Section at Argonne National Laboratory. He received his engineering diploma at the Industrial System Engineering School in La Rochelle, France, in 1997. After working for PSA Peugeot Citroen in the Hybrid Electric Vehicle Research Department, he joined Argonne National Laboratory in 1999, where he is now responsible for the development of Autonomie. He received an R&D 100 Award in 2004 and Vehicle Technologies Program Award in 2010. He has authored more than 40 technical papers in the area of advanced vehicle technologies.